

**HTL**

**2440B**



## 4.0 Ton Two-post Lift with Base

Automatic solenoid lock release, with H type reinforcement base



CE EAC

## Technical Features



### Control

24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH



### Lifting Arms

Asymmetric 2+3 stages lifting arms increasing overall arm positioning for lifting a variety of different wheel base vehicles




### Lifting Pad

Drop-in type dual stage threaded lifting arm pad




### Arm Locks

Automatic arm locking during lifting and automatic unlocking when the arm reaches the floor



### Arm Holder

C-type enclosed arm holder give more strength and safety



### Foot Protection

Lifting arms equipped with foot protection bars



### Door Protection



Anti-collision door protection rubber on carriages



### Reinforcement Base

H-type reinforcement base for bad concrete floor

## Technical Drawing

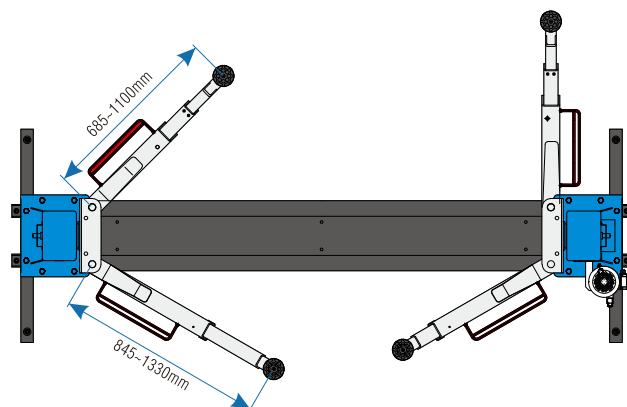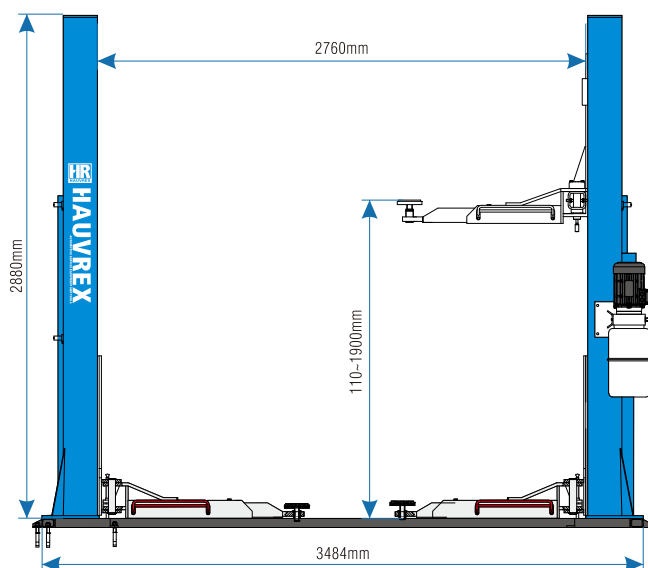

## Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	2,880mm
Overall Width	3,484mm
Width between Posts	2,760mm
Short Arm Length	685~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph