


HTL

2340



4.0 Ton Two-post Lift with Base

Automatic solenoid lock release, manual lowering valve handle

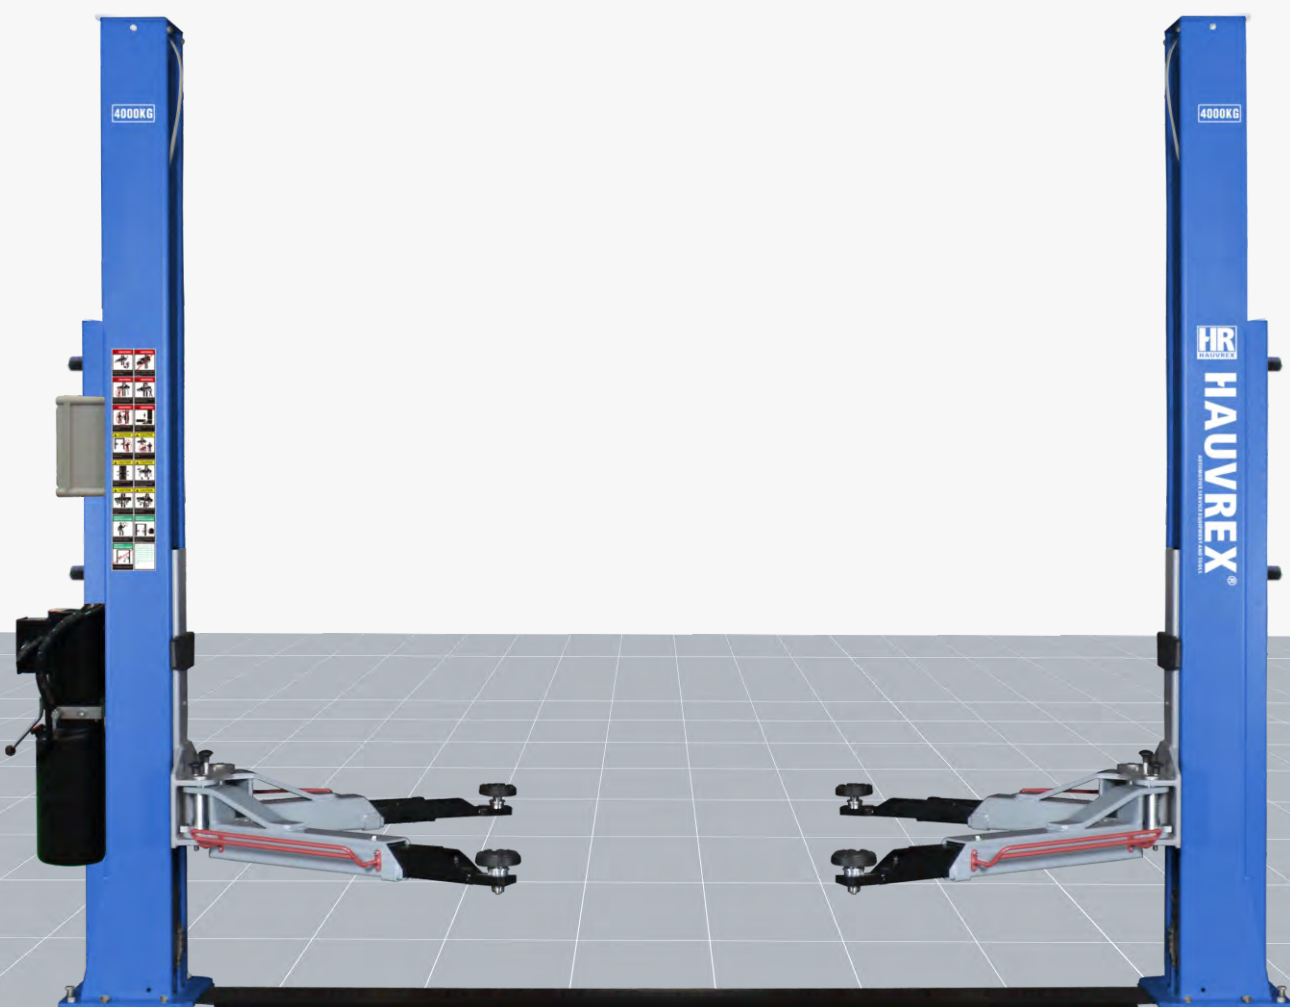

CE EAC

Technical Features



Control

24V low voltage control box with UP, LOCK and MAIN POWER SWITCH



Lowering

Manual lowering valve handle on power pack



Lifting Arms

Asymmetric 2-stage lifting arms




Lifting Pads

Drop-in type dual stage threaded lifting arm pad




Arm Locks

Automatic arm locking during lifting and automatic unlocking when the arm reaches the floor



Arm Holder

C-type enclosed arm holder give more strength and safety



Foot Protection



Lifting arms equipped with foot protection bars



Door Protection

Anti-collision door protection rubber on carriages

Technical Drawing

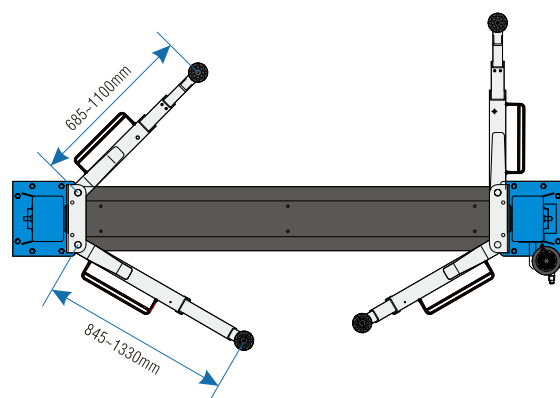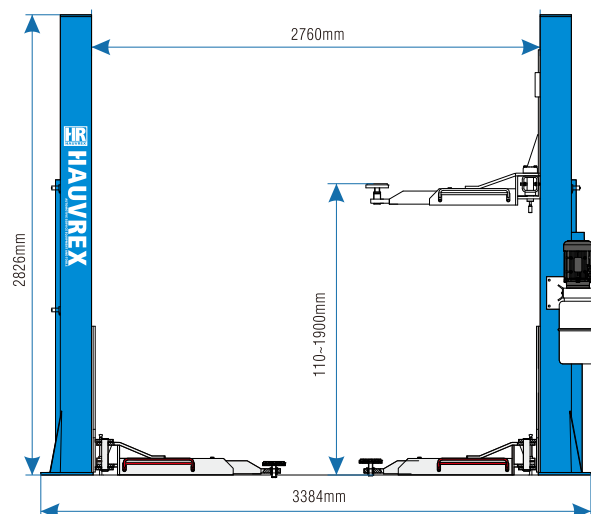

Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	2,826mm
Overall Width	3,384mm
Width between Posts	2,760mm
Short Arm Length	685-1,100mm
Long Arm Length	845-1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph