

HTL

3740



4.0 Ton Clear Floor Two-post Lift

Single side manual lock release, single piece column




CE EAC

Technical Features




Control

24V low voltage control box with UP, DOWN button and emergency stop button



Lifting Arms

2-stage long straight lifting arms and 2-stage short elbow lifting arms gives ideal asymmetric lifting points




Lifting Pads

Drop-in type single stage threaded lifting arm pad




Arm Locks

Fully covered 360 degree arm locking teeth guarantees secure locking at any position



Lock Release

Safety locks with automatic engagement and single side manual lock release



Direct Drive

Low pressure direct drive cylinders eliminating the need for lifting chains





Door Protection

Anti-collision door protection rubber on carriages



Overhead Protection

Padded overhead protection bar automatically stops the lift should a vehicle come in contact with overhead structure.

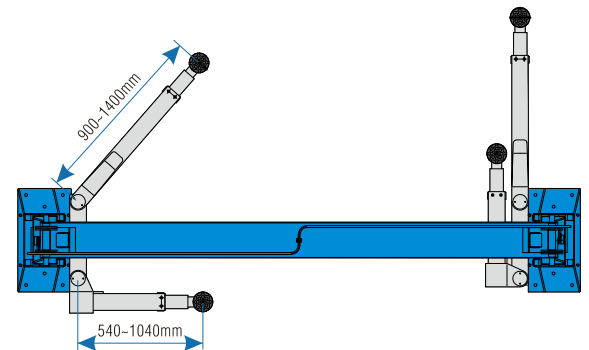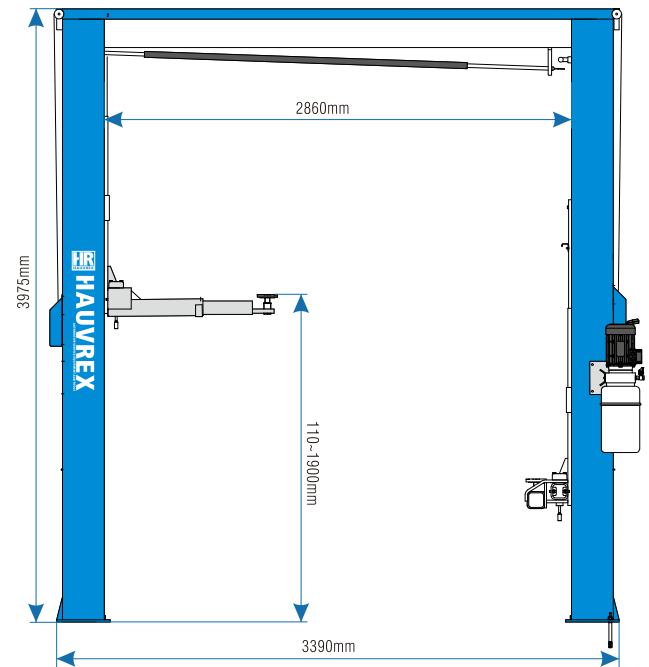

Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	3,975mm
Overall Width	3,390mm
Width between Posts	2,860mm
Short Arm Length	540-1,040mm
Long Arm Length	900-1,400mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph