

**HTL**

**3840**

**Min.**  
100mm

**1900mm**  
**Max.**

**4000kg**  
**Capacity**

# 4.0 Ton Clear Floor Two-post Lift

Automatic solenoid lock release




**CE EAC**

## Technical Features



### Control

24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH and emergency stop button



### Lifting Arms

Asymmetric 2-stage lifting arms



### Lifting Pads

Drop-in type lifting arm pad



### Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



### Arm Holder

C-type enclosed arm holder give more strength and safety




### Safety Lock

Safety locks with automatic engagement and automatic solenoid lock release




### Height Adaptor

Included truck & van adaptors ideals for trucks & vans with running boards or auxiliary fuel tanks



### Door Protection

Anti-collision door protection rubber on carriages

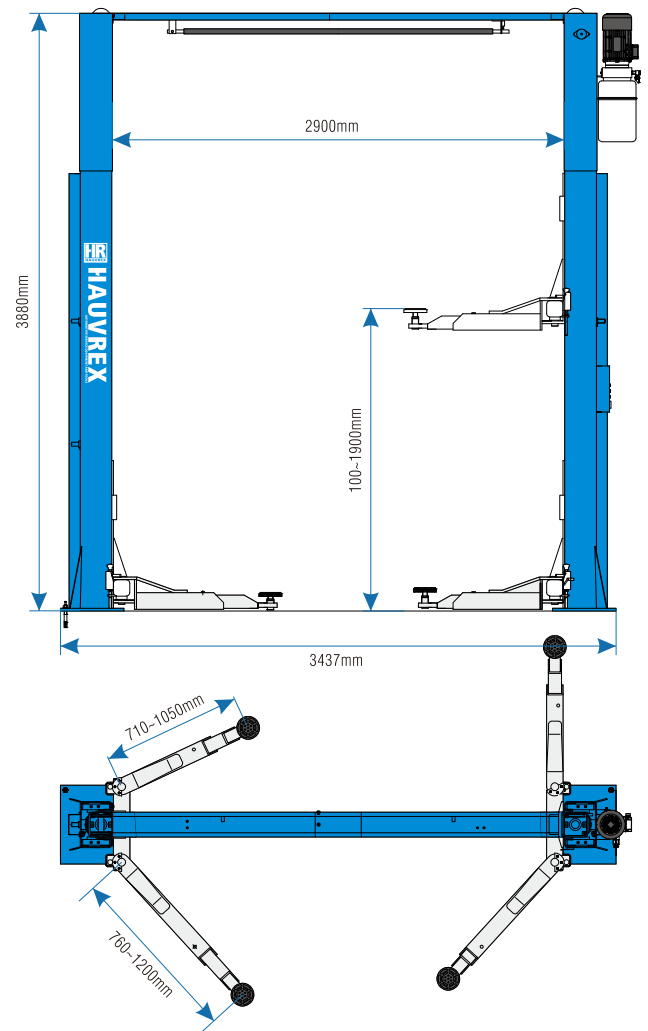

## Technical Data

Lifting Capacity	4,000kg
Min. Height	100mm
Max. Lifting Height	1,900mm
Overall Height	3,880mm
Overall Width	3,437mm
Width between Posts	2,900mm
Short Arm Length	710~1,050mm
Long Arm Length	760~1,200mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph