


HFL

4045(E)/4055(E)

4.5/5.5 Ton Four-post Platform Lift

Pneumatic lock release

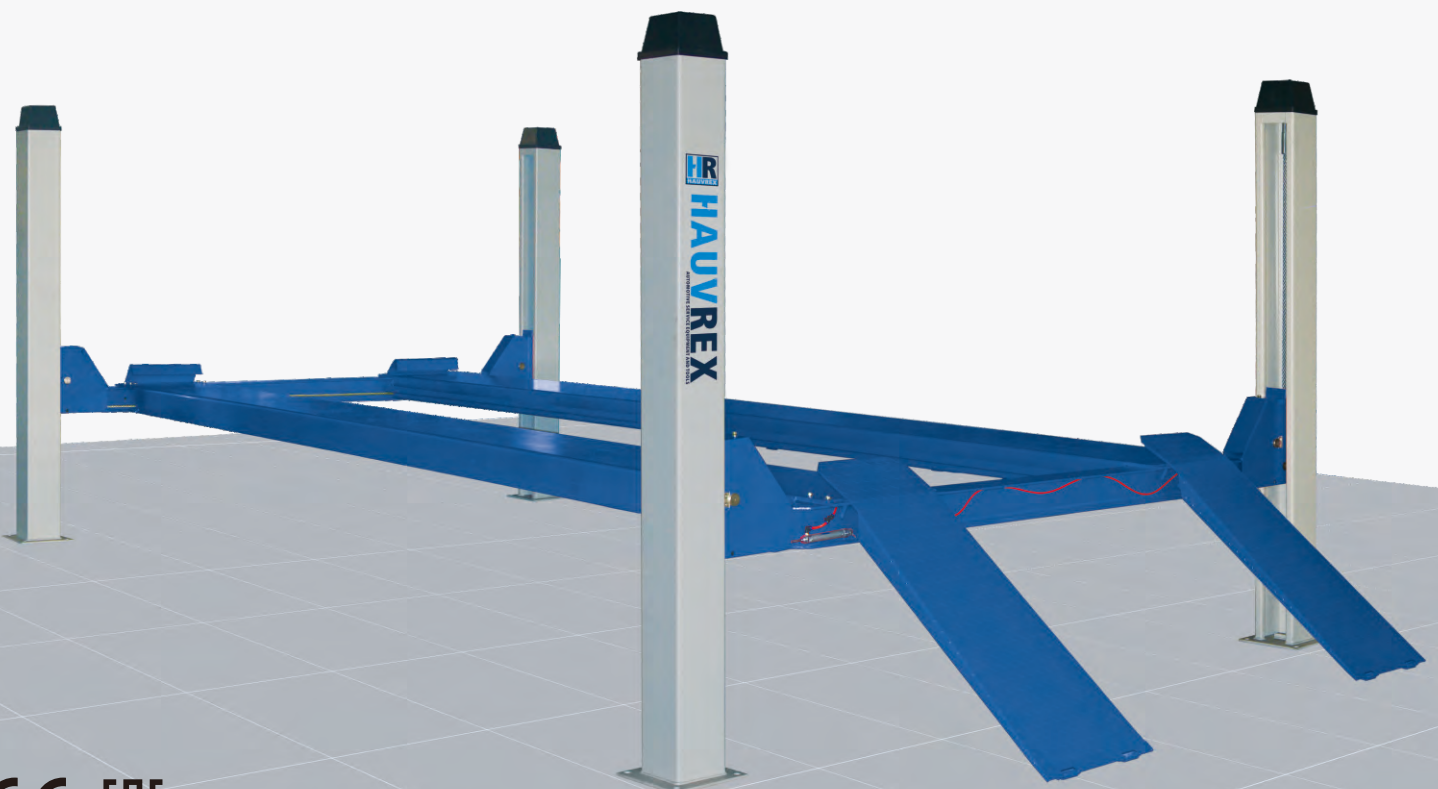

CE EAC


Note: Models with E are without control box

Technical Features



Control

24V low voltage control box with UP, DOWN and main power switch



Lock Release

Standard pneumatic safety lock release



Drive Ramp

Drive ramp features non-skid structure



Wheel Stop

Wheel stops in front of the platform



Power Pack

Power pack with aluminum motor





Air Filter

Air filter to protect lock release cylinder from rust



Rolling Jack

Manual/Pneumatic rolling jack 2 ton/3ton are optional

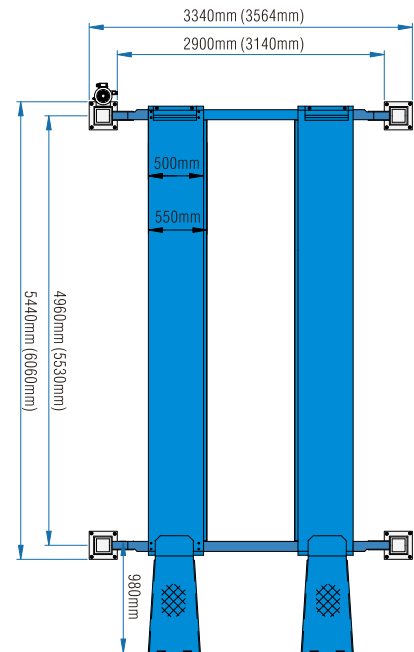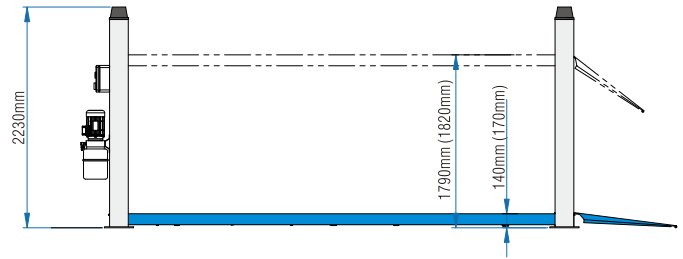

Note: HFL4045 (HFL4055)

Technical Data

Model	HFL4045(E)	HFL4055(E)
Lifting Capacity	4,500kg	5,500kg
Min. Height	140mm	170mm
Max. Lifting Height	1,790mm	1,820mm
Overall Length	5,440mm	6,060mm
Overall Width	3,340mm	3,564mm
Overall Height	2,230mm	2,230mm
Runway Length	4,960mm	5,530mm
Runway Width	550mm	550mm
Width between Posts	2,860mm	3,140mm
Width between Platforms	800~1,100mm	800~1,100mm
Lifting/Lowering Time	55Sec./45Sec.	55Sec./45Sec.
Motor Power	2.2kW	3.0kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph	380V/50Hz/3Ph 220V/50Hz/1Ph